

TECHNICAL DATA

Entra B 20 | 10 miniBTE T

Bernafon Entra B is a hearing instrument with Hybrid Technology™. The miniBTE T is a behind-the-ear hearing instrument designed for users with slight to severe hearing losses. It includes Bluetooth® Low Energy for streaming and

NFMI technology, a telecoil, and single push-button for volume and program changes. The miniBTE T is available with the miniFit thin tube system, which includes a variety of domes and custom moulds.

Hook



MNB T

Thin tube 1.3 mm



MNB T

Thin tube 0.9 mm



MNB T

Technical features

- Direct audio streaming¹
- Hands-free communication²
- Bluetooth Low Energy technology
- NFMI (Near-Field Magnetic Induction)
- Single push-button
- Telecoil
- Thin tube thin tube
- Hydrophobic coating
- LED visual indicator

Accessories

- Bernafon App
- RC-A (remote control)
- TV-A (TV adapter)
- SoundClip-A

For information on compatibility, please visit www.bernafon.com/compatibility

Operating and charging conditions
Temperature: +1°C to +40°C (34°F to 104°F)
Humidity: 5% to 93% relative humidity, non-condensing
Atmospheric pressure: 700 hPa to 1060 hPa

Transportation and storage conditions
Temperature and humidity shall not exceed the mentioned limits for extended periods during transportation and storage.

Transport
Temperature: -25°C to +60°C (-13°F to 140°F)
Humidity: 5% to 93% relative humidity, non-condensing
Atmospheric pressure: 700 hPa to 1060 hPa

Storage
Temperature: -25°C to +60°C (-13°F to 140°F)
Humidity: 5% to 93% relative humidity, non-condensing
Atmospheric pressure: 700 hPa to 1060 hPa

1) From iPhone, iPad, Mac and select Android devices

2) Hands-free communication is available on select devices




WARNING: No modification of this equipment is allowed.

Apple, the Apple logo, iPhone, iPad, Mac and the Mac logo are trademarks of Apple Inc., registered in the U.S. and other countries. Use of the Made for Apple badge means that an accessory has been designed to connect specifically to the Apple product(s) identified in the badge, and has been certified by the developer to meet Apple performance standards. Apple is not responsible for the operation of this device or its compliance with safety and regulatory standards. Android™ is a trademark of Google LLC.



Fitting ranges

Bernafon Entra B 20 | 10

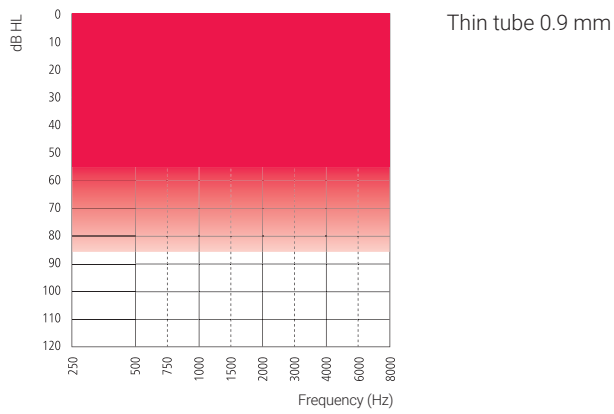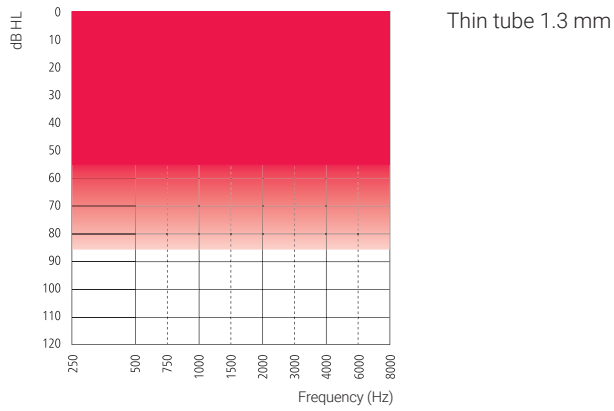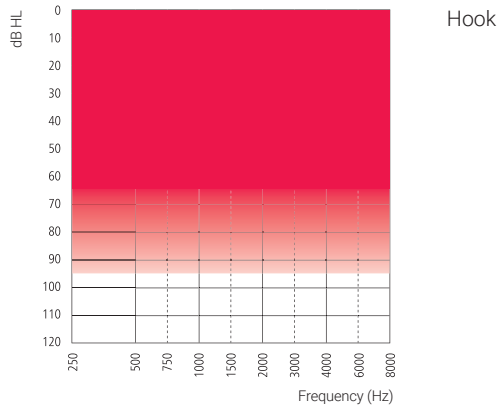

Feature overview

	Entra B 20	Entra B 10
Hybrid Technology™		
Hybrid Sound Processing™	•	•
Frequency bandwidth	8 kHz	8 kHz
Speech Balancer	•	•
Hybrid Noise Management™	•	•
Smart Noise Reduction	3 options	2 options
Smart Directionality	4 options	3 options
Hybrid Feedback Canceller™	•	•
Speech		
Low Frequency Enhancer	•	•
Frequency Composition™ ^{txt}	•	•
Comfort		
Transient Noise Reduction	2 options	—
Wind Noise Manager	•	•
Soft Noise Manager	•	•
Directionality controls		
Dynamic	•	—
Adaptive Full Directionality	•	•
Fixed Directionality	•	•
Fixed Omni	•	•
Individualisation		
Personalisation	•	•
Fitting bands	14	12
Program options/memories	10/4	8/4
Music Experience	•	—
Binaural coordination: VC, program change	•	•
Automatic Adaptation Manager	•	•
Transition	•	•
Data Logging	•	•
Tinnitus SoundSupport	•	•
CROS compatibility	•	•

Entra B 20 | 10 miniBTE T

Ear Simulator



Measured according to IEC 60118-0:1983/AMD1:1994, IEC 60118-0:2015, IEC 60118-1:1995+AMD1:1998 CSV and IEC 60318-4:2010



Technical information
Omnidirectional mode is used unless otherwise stated.

Hook / Thin tube 1.3
 — Acoustic input: 60 dB SPL
 - - - Magnetic input: 31.6 mA/m

Thin tube 0.9
 — Acoustic input: 60 dB SPL
 - - - Magnetic input: 31.6 mA/m

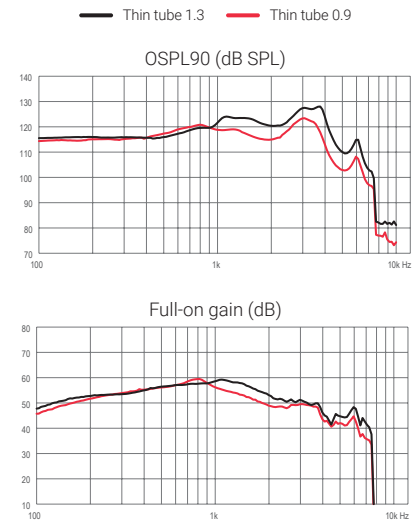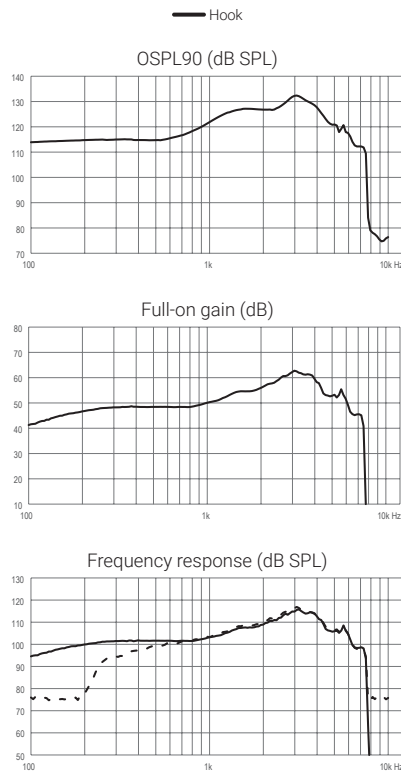

	Hook	Thin tube 1.3	Thin tube 0.9
OSPL90, Peak (dB SPL)	132	128	123
OSPL90, 1600 Hz (dB SPL)	127	123	116
OSPL90, HFA (dB SPL)	126	122	118
Full-on gain, Peak (dB) ¹	63	59	59
Full-on gain, 1600 Hz (dB) ¹	55	56	52
Full-on gain, HFA (dB) ¹	55	55	52
Reference test gain (dB)	48	47	41
Frequency range (Hz)	100-7500	100-7500	100-7500
Telecoil output, 1 mA/m field (1600 Hz) (dB SPL)	86	88	87
Telecoil output, 10 mA/m field (1600 Hz) (dB SPL)	106	*	*
Total harmonic distortion (Input 70 dB SPL), 500 Hz (%)	<4	<5	<3
Total harmonic distortion (Input 70 dB SPL), 800 Hz (%)	<4	<2	<2
Total harmonic distortion (Input 70 dB SPL), 1600 Hz (%)	<2	<2	<3
Equivalent input noise level, Omni (dB SPL)	18	15	19
Equivalent input noise level, Dir (dB SPL)	28	*	*
Battery consumption, Typical (mA) ²	1.9	2.0	2.0
Battery consumption, Quiescent (mA) ²	1.9	1.9	1.9
Battery life, artificial measurement, hours ³	95	90	90
Expected battery life, hours (battery size 312 - IEC PR41) ⁴	50-55	*	*

* No measurement performed.

1) Full-on gain is measured with the gain control of the hearing instruments set to its full-on position minus 20 dB and with an input SPL of 70 dB. This is to obtain a gain response equal to the full-on gain response from e.g. IEC 60118-0+A1:1994 but without influence of feedback.

2) Battery current is measured according to IEC 60118-0:1983/AMD1:1994 §7.11, IEC 60118-0:2015 §7.7 and ANSI S3.22:2014 §6.13 after a settling time of minimum 3 minutes.

3) Based on the standardised battery consumption measurement (IEC 60118-0:1983/AMD1:1994). The actual battery life depends on battery quality, use pattern, active feature set, hearing loss and sound environment.

4) Real usage battery life is shown as an estimated interval based on mixed use cases with variable amplification settings and variable input levels, incl. direct stereo streaming from a TV (25% of the time) and streaming from a mobile phone (6% of the time).

Entra B 20 | 10 miniBTE T

2CC Coupler



Measured according to ANSI S3.22:2014, IEC 60118-0:2015 and IEC 60318-5:2006



Technical information
Omnidirectional mode is used unless otherwise stated.

Hook / Thin tube 1.3
— Acoustic input: 60 dB SPL
- - - Magnetic input: 31.6 mA/m

Thin tube 0.9
— Acoustic input: 60 dB SPL
- - - Magnetic input: 31.6 mA/m

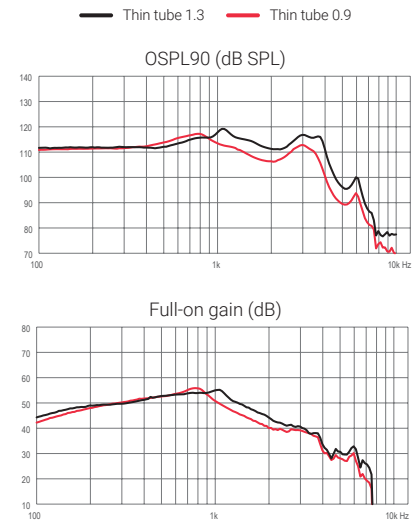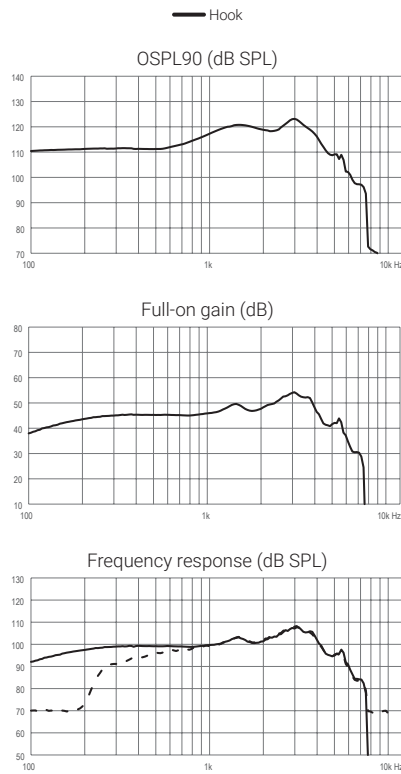

	Hook	Thin tube 1.3	Thin tube 0.9
OSPL90, Peak (dB SPL)	123	119	117
OSPL90, 1600 Hz (dB SPL)	121	114	108
OSPL90, HFA (dB SPL)	119	115	110
Full-on gain, Peak (dB) ¹	54	55	56
Full-on gain, 1600 Hz (dB) ¹	48	48	44
Full-on gain, HFA (dB) ¹	48	48	44
Reference test gain (dB)	42	37	34
Frequency range (Hz)	100-7300	100-6300	100-6800
Telecoil output, 1 mA/m field (1000 Hz) (dB SPL)	75	85	84
Telecoil output, HFA SPLITS L/R (dB SPL)	100	97	91
Total harmonic distortion (Input 70 dB SPL), 500 Hz (%)	<4	<4	<2
Total harmonic distortion (Input 70 dB SPL), 800 Hz (%)	<3	<2	<2
Total harmonic distortion (Input 65 dB SPL), 1600 Hz (%)	<2	<2	<2
Equivalent input noise level, Omni (dB SPL) ²	17	19	21
Equivalent input noise level, Dir (dB SPL)	29	*	*
Battery consumption, Typical (mA) ²	2.0	1.9	2.0
Battery consumption, Quiescent (mA) ²	1.9	1.9	1.9
Battery life, artificial measurement, hours ³	90	95	90
Expected battery life, hours (battery size 312 - IEC PR41) ⁴	50-55	*	*


* No measurement performed.

1) Full-on gain is measured with the gain control of the hearing instruments set to its full-on position minus 20 dB and with an input SPL of 70 dB. This is to obtain a gain response equal to the full-on gain response from e.g. IEC 60118-0+A1:1994 but without influence of feedback.

2) Battery current is measured according to IEC 60118-0:1983/AMD1:1994 §7.11, IEC 60118-0:2015 §7.7 and ANSI S3.22:2014 §6.13 after a settling time of minimum 3 minutes.

3) Based on the standardised battery consumption measurement (IEC 60118-0:1983/AMD1:1994). The actual battery life depends on battery quality, use pattern, active feature set, hearing loss and sound environment.

4) Real usage battery life is shown as an estimated interval based on mixed use cases with variable amplification settings and variable input levels, incl. direct stereo streaming from a TV (25% of the time) and streaming from a mobile phone (6% of the time).

 SBO Hearing A/S
Kongebakken 9
DK-2765 Smørum
Denmark

www.bernafon.com

Bernafon is part of the Demant Group.

