



Model (Standard Receiver)	SN960S-DRWC* SN961-DRW* SN962-DRW*	SN760S-DRWC SN761-DRW SN762-DRW	SN560S-DRWC SN561-DRW SN562-DRW	SN460S-DRWC SN461-DRW SN462-DRW
Device Configurations				
Battery size 60S-DRWC	Rechargeable Lithium-Ion			
Battery size 61-DRW	312 Zinc-Air			
Battery size 62-DRW	13 Zinc-Air			
Receiver Options	LP, MP, HP, UP			
Control Options	TapControl (60S-DRWC), Push button (61-DRW and 60S-DRWC), Multi-Function button (62), Telecoil (62)			
IP Classification	IP68			
Audiological Features				
Channels	17	14	12	12
Intelligent All-Around**	●	-	-	-
360 All-Around	●	●	-	-
All Access Directionality	-	-	●	-
Binaural Directionality III	-	-	-	●
Intelligent Focus**	●	●	-	-
Clear Focus***	●	●	-	-
Front Focus	-	-	●	-
Ultra Focus	-	-	-	●
Spatial Sense	●	●	●	●
Autoscope Adaptive Directionality (w/Adjustable Directional Mix)	●	●	●	●
Synchronised Soft Switching	●	●	●	●
Streaming Bass Boost	3 Settings	3 Settings	2 Settings	2 Settings
Environmental Optimizer II	●	-	-	-
Environmental Optimizer I	-	●	●	●
Intelligent Noise Tracker**	3 Settings	On/Off	-	-
Noise Tracker II	5 Settings	4 Settings	3 Settings	2 Settings
Wind Guard	3 Settings	3 Settings	2 Settings	2 Settings
Impulse Noise Reduction	3 Settings	3 Settings	2 Settings	2 Settings
Expansion	3 Settings	3 Settings	2 Settings	2 Settings
Sound Shaper	●	●	●	●
DFS Ultra III (w/Music Mode)	●	●	●	●
Synchronised Acceptance Manager	●	●	●	●
Tinnitus Sound Generator	●	●	●	●
Functional Features				
Ear-to-Ear Communication	●	●	●	●
MultiConnect**	●	●	●	●
Bluetooth® Auracast™	●	●	●	●
Direct audio streaming (compatible iOS**** and Android™ devices)	●	●	●	●
TV-Streamer+, Multi-Mic+ and Remote Control	●	●	●	●
ReSound Smart 3D™ app	●	●	●	●
Sound Enhancer (ReSound Smart 3D™ app)	●	-	-	-
Remote Fine Tuning and Updates				
ReSound Assist	●	●	●	●
ReSound Assist Live	●	●	●	●
Remote Firmware Updates	●	●	●	●
Fitting Features				
Fitting Software ReSound Smart Fit™ 2.4 or higher	●	●	●	●
Fully Flexible Programs	4	4	4	4
Datalogging	●	●	●	●
Wireless fitting with Noahlink Wireless	●	●	●	●
Automatic Receiver Detection	●	●	●	●

* SNX60S-DRWC, SNX61-DRW, and SNX62-DRW models have the capability to change the feature set from the highest level to the other price points for demo purposes

** Intelligent All-Around, Intelligent Noise Tracker, Intelligent Focus, and MultiConnect are only available in the 60S model

*** Clear Focus only available for the 61 and 62 models

**** Hands-free calls are compatible with iPhone 11 or later, iPad Pro 12.9-inch (5th generation), iPad Pro 11-inch (3rd generation), iPad Air (4th generation), iPad mini (6th generation), iPad (10th generation) or later, with software updates iOS 15.3 and iPadOS 15.3 or later



Desktop charger
Charging form factor (CFF) 8



Standard charger
Charging form factor (CFF) 8



Premium charger
Charging form factor (CFF) 8



© 2026 GN Hearing A/S. All rights reserved. ReSound is a trademark of GN Hearing A/S. Apple, the Apple logo, iPhone and iPad are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc., registered in the U.S. and other countries. Android, Google Play and the Google Play logo are trademarks of Google LLC. The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The Auracast word mark and logos are trademarks owned by Bluetooth SIG, Inc.

Worldwide Headquarters
GN Hearing A/S
Lautrupbjerg 7
DK-2750 Ballerup
Denmark
Tel: +45 4575 1111
resound.com

CVR no. 55082715

United Kingdom
GN Hearing UK Ltd.
Unit 13
Talisman Business Centre
Bicester
Oxon OX26 6HR
Tel: +44 1869 352800
resound.com

Australia
GN Hearing Australia Pty Ltd
Suite 1001, Level 1
1 Julius Avenue
North Ryde, NSW 2113
Tel: (free) 1800 658 955
gnhearing.com/en-au/

New Zealand
GN Hearing New Zealand Limited
4 Fred Thomas Drive
Takapuna, Auckland, 0622
Tel: (free) 0800 900 126
gnhearing.com/en-nz/

Technical Specifications

		LP	MP	
		ANSI S3.22-2014 IEC 60118-0:2022 2cc coupler	ANSI S3.22-2014 IEC 60118-0:2022 2cc coupler	
Reference test gain (60 dB SPL input)	HFA	31	36	dB
Full-on gain (50 dB SPL input)	Max. HFA	56 50	60 55	dB
Maximum output (90 dB SPL input)	Max. HFA	113 109	115 113	dB SPL
Total harmonic distortion	500 Hz	0.6	0.7	%
	800 Hz	0.8	0.9	
	1600 Hz	1.4	1.3	
	3200 Hz	0.6	0.6	
Full-on SPLIV @ 10mA/m*	Max.	107	110	dB SPL
HFA - SPLIV @ 31.6 mA/m	HFA	92	97	
Full-on HFA-SPLIV @ 10mA/m	HFA	101	106	
Equivalent input noise, w/o Noise reduction	HFA	22	20	dB SPL
Frequency range		≤200 - ≥8000	≤200 - ≥8000	Hz
Battery Lifetime (Battery type Rechargeable)**		30 (max) 24 (typ)	30 (max) 24 (typ)	Hours
Current Drain (Quiescent / Operating) (Model 61-DRW, 62-DRW)		0.81 / 1.03	0.81 / 0.92	mA


* Telecoil is only for the SNx62-DRW models.
** Expected operating time of the rechargeable battery depends on active features, the use of wireless accessories, hearing loss, battery age and sound environment.
Maximum number includes no streaming; typical number includes several hours of streaming.

Technical Specifications



		HP	UP	
		ANSI S3.22-2014 IEC 60118-0:2022 2cc coupler	ANSI S3.22-2014 IEC 60118-0:2022 2cc coupler	
Reference test gain (60 dB SPL input)	HFA	41	46	dB
Full-on gain (50 dB SPL input)	Max. HFA	60 54	71 65	dB
Maximum output (90 dB SPL input)	Max. HFA	120 118	129 123	dB SPL
Total harmonic distortion	500 Hz	0.5	0.5	%
	800 Hz	0.8	0.4	
	1600 Hz	0.8	0.1	
	3200 Hz	0.4	0.1	
Full-on SPLIV @ 10mA/m*	Max.	112	122	dB SPL
HFA - SPLIV @ 31.6 mA/m	HFA	103	106	
Full-on HFA-SPLIV @ 10mA/m	HFA	106	115	
Equivalent input noise, w/o Noise reduction	HFA	21	20	dB SPL
Frequency range		≤200 - 6590	≤200 - 4650	Hz
Battery Lifetime (Battery type Rechargeable)**		30 (max) 24 (typ)	30 (max) 24 (typ)	Hours
Current Drain (Quiescent / Operating) (Model 61-DRW, 62-DRW)		0.81 / 0.94	0.81 / 0.87	mA

* Telecoil is only for the SNx62-DRW models.
** Expected operating time of the rechargeable battery depends on active features, the use of wireless accessories, hearing loss, battery age and sound environment.
Maximum number includes no streaming; typical number includes several hours of streaming.

Patents pending.

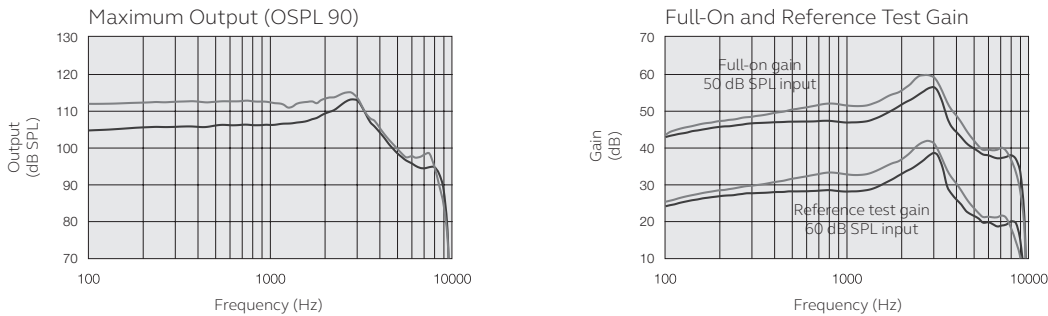


■ LP
■ MP

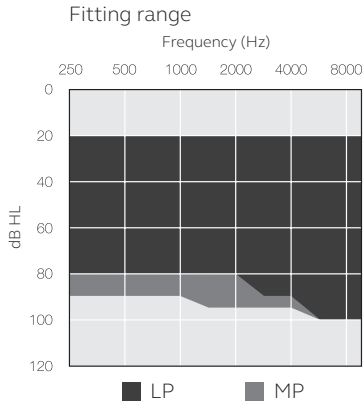
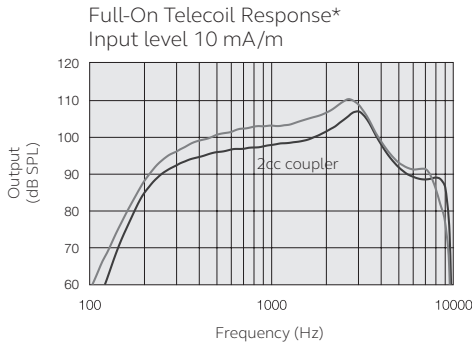


■ LP
■ MP

Patents pending.

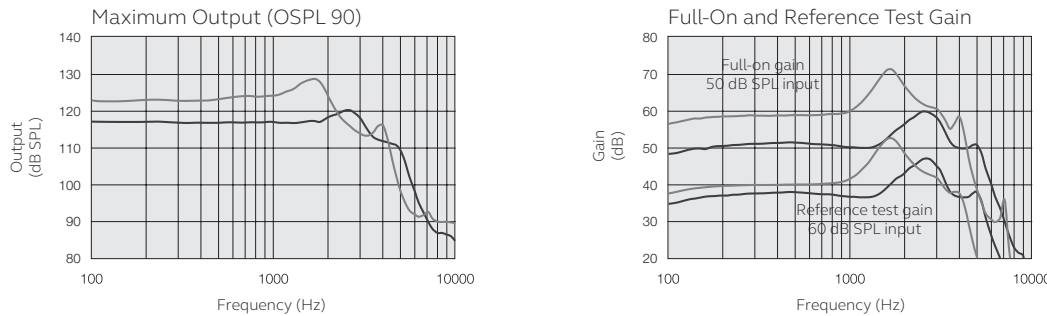

■ HP
■ UP

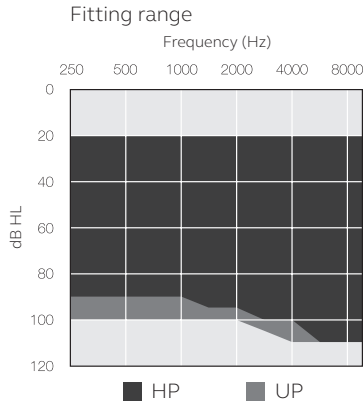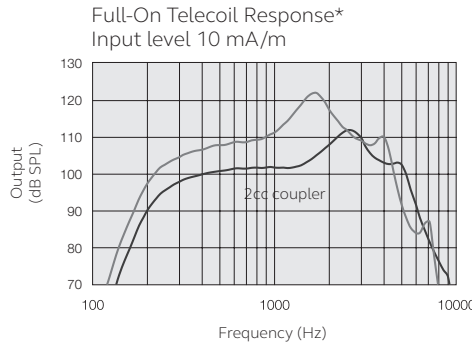

■ HP
■ UP

All specifications are subject to change without notice.

All specifications are subject to change without notice.