


# WIDEX ENJOY™ MINI-RIC WITH DUAL CORE PROCESSOR



The WIDEX MINI-RIC is based on the WIDEX ENJOY-platform, with a Widex dual core chip that handles automatic processing more accurately and faster than before.

- Multiple wireless connectivity via WidexLink technology and TONELINK App
- Compatible with the DEX assistive listening devices
- Uses M-receiver
- Uses a size 10 battery
- Protection class IP68
- Minimal to severe hearing losses

## SUGGESTED FITTING RANGE

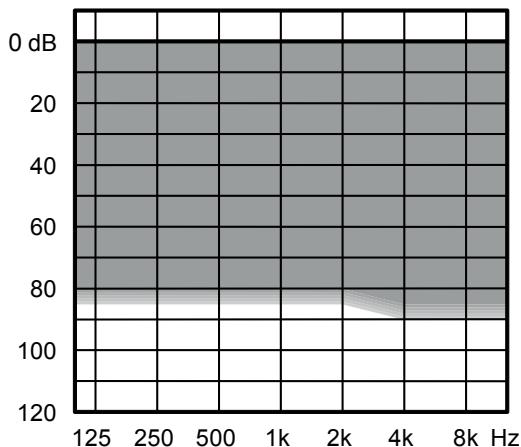

## STANDARD TECHNOLOGY

- ENJOY-platform with dual core processor
- Improved Widex open-fit rationales
- Acclimatisation rationales
- Power Saver IV technology for low current consumption

KEY FEATURES	440	330	220	110
Performance	XXXXXX	XXXXXX	XXXXX	XXXX
Processing and fine-tuning channels	15	12	10	6

## CONNECTIVITY

WidexLink to DEX assistive listening devices*	•	•	•	•
---	---	---	---	---

## APPS FOR iOS AND ANDROID

TONELINK App	•	•	•	•
COM-DEX App	•	•	•	•


## FEATURES

Adaptation manager	•	•	•	•
Fluid Sound Analyser (sound classes)	11 (IE)	7 (IE)	4	3
Programs	5	4	3	3
Smartwind Manager	•			
High-frequency boost	•			
Speech Enhancer RT	RT/IE	IE		
Digital Pinna	•	•		
Locator	HD	HD	HD	•
TruSound Softener	•	•	•	
Preference Control**	•	•	•	
Soft-level noise reduction	•	•	•	
Noise Reduction	•	•	•	
ZEN IE/ZEN+	•	•	•	
CROS Support	•	•	•	
Audibility Extender	•	•	•	


\*Also includes DEX assistive listening devices: CALL-DEX, TV-DEX, COM-DEX, UNI-DEX, RC-DEX, FM+ DEX, PHONE-DEX 2

\*\*Via TONELINK App or DEX


## MAXIMUM OUTPUT - EAR SIMULATOR

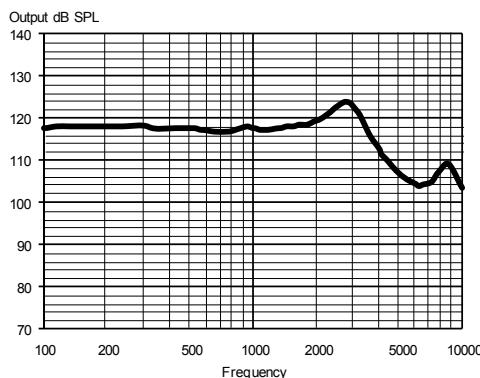


## MAXIMUM OUTPUT - 2CC COUPLER

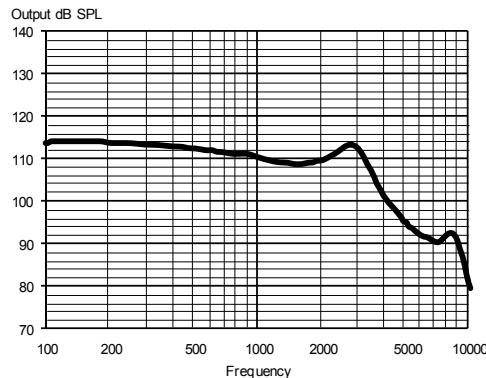

## OUTPUT - EAR SIMULATOR

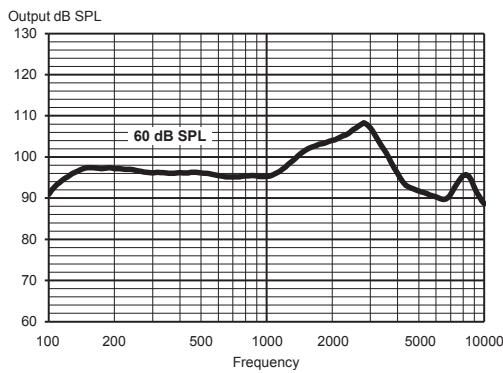

## OUTPUT - 2CC COUPLER

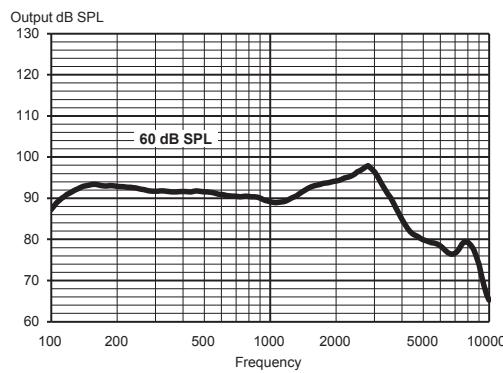

## Technical data:

Typical data obtained through standard pure tone measurements. Hearing aid set to Compass Reference Test Gain, unless stated otherwise. Measured using a standard ITE coupler without wax guard. For further information, please contact Widex at [global.widex.com](http://global.widex.com).

	EAR SIMULATOR IEC 60118-0:1983 + A1:1994	2CC COUPLER IEC 60118-0:2015 , ANSI S3.22-2014	
OSPL90	1600 Hz Peak Average	118 dB SPL 124 dB SPL 118 dB SPL	109 dB SPL 114 dB SPL 111 dB SPL
Acoustic output (Input 60 dB SPL)	1600 Hz Peak Average	102 dB SPL 108 dB SPL 98 dB SPL	93 dB SPL 98 dB SPL 93 dB SPL
Full-on gain (Input 50 dB SPL, Compass Full-on gain)	1600 Hz Peak Average	63 dB 69 dB 64 dB	54 dB 59 dB 56 dB
Acoustic frequency range		100 Hz - 10000 Hz	100 Hz - 9000 Hz
Harmonic distortion (typical)	500 Hz 800 Hz 1600 Hz	<2% <2% <2%	<2% <2% <2%
Equivalent input noise		22 dB SPL	22 dB SPL
Battery drain (standby)		0.98 mA	0.98 mA
Battery drain*		1.00 mA	1.02 mA
Battery life (Type 10 Zn-Air, 100 mAh)*		100 h	100 h
Mobile phone immunity (IEC 60118-13:2016, ANSI C63.19:2011)		IRIL: -39/-7/-4 dB SPL	U-rating: M4

\* Battery life in real life situations depends among others on the hearing aid features used, streaming time, and the quality of the battery used.

Do not modify this equipment without authorization of the manufacturer. Spare parts and instructions for correct repair can be acquired from Widex.